


SPECIFICATIONS SHEET

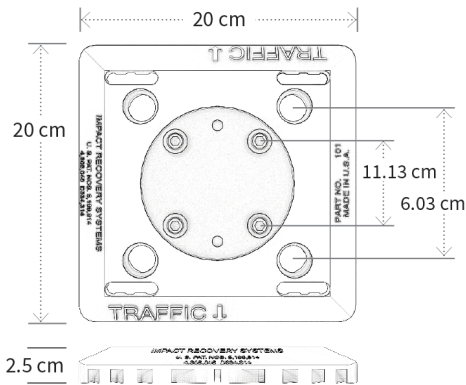

Dimensions:

Overall: 20cm x 20cm x 2.5cm

Hole Pattern: 11.13 cm
(Center to Center)

Cap Screw Spacing: 6.03cm
(Center to Center)

PHONE: +1(210) 736-4477

FAX: +1(210) 734-6448

www.ImpactRecovery.com

info@ImpactRecovery.com

Impact Recovery Systems, Inc.
4955 Stout Dr.
San Antonio, TX 78219
United States



SURFACE MOUNT FIXED BASE PERMANENT, SURFACE MOUNTED SQUARE BASE

SPEC-BS-SMF | 05/09/2017



FEATURES

- Interchangeable Uprights
- Durable HDPE Plastic
- Resistant to UV Light, Ozone & Hydrocarbons
- Low-Profile Design
- Instantly Operational
- Installs Easily with anchors or epoxy

SPECIFICATIONS

Material: High Density Polyethylene

Hardware: Zinc-plated, socket cap screws and t-nuts

Optional Stainless Steel Hardware: Stainless steel screws and t-nuts

Colors: Black (Integral color)

Installation:

- **4 anchors**—Impact Traffic anchor kit (recommended)
- **Epoxy**

Upright Support: Supports all Impact Traffic uprights that utilize our *fixed* spring type.

RECOMMENDED USE

- Permanent applications

Take care to avoid creating a trip hazard when using any sign in the presence of pedestrians. Ensure that sign bases are outside pedestrian travel areas.